



SPT 6

- 0.125 in (3.1 mm) to 0.625 in (16 mm) capacity
- Manual clamp and upset
- Filing vise
- Caster mounted
- NEMA 12 electrics with disconnect
- Infinitely variable heat selection
- 480/3/60 Volt single phase with 24 Volt controls
- Interlocked safety guards
- Annealing jaws (Optional)
- 110-Volt outlet for grinder (Standard)



SPT 10

- 0.250 in (6.4 mm) to 1.0 in (25.4 mm) capacity
- Pneumatic clamp and upset
- Filing vise
- Caster mounted
- NEMA 12 electrics with disconnect
- Infinitely variable heat selection
- 480/3/60 Volt single phase with 24 Volt controls
- Interlocked safety guards
- Anneal device
- 110-Volt outlet for grinder (Standard)

Options

- Anneal device SPT6
- 230 or 575-Volt




SPT 12

- 0.625 in (16 mm) to 1.250 in (32 mm) capacity
- Pneumatic clamp and upset
- Filing vise
- Caster mounted
- NEMA 12 electrics with disconnect
- Infinitely variable heat selection
- 480/3/60 Volt single phase with 24 Volt controls
- Interlocked safety guards
- Anneal device
- 110-Volt outlet for grinder (Standard)

Options

- Anneal device SPT6
- 230 or 575-Volt

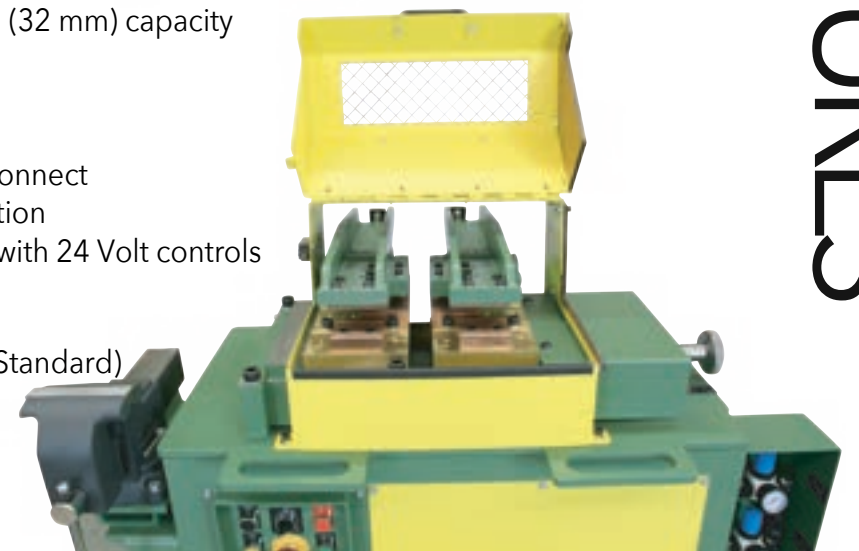

STANDARD FEATURES